

SANISUB[®] STEEL

AND EMERGENCY KIT

Lifting height of 7m

Integrated non-return valve

Automatic float release

Particle size of 10 mm

Basket, 15m hose and hose support included



TECHNICAL CHARACTERISTICS

Discharge	32 mm
Motor	450 Watts / 2A
Voltage	220-240 V / 50 Hz
Working Water Temperature	Max 75°C (intermittent)
Product Weight	13 kg's
Overall Measurements	168 x 276 mm (pump)
IP Rating	IP68
Motor Cable Length	10m
Q Max (m ³ /h)	9 (m ³ /h)
Max Discharge Height	7.5

WHY CHOOSE THIS PRODUCT

Portable compact in design, easy to use




Submersible pump for clean grey or rainwater

Optimized motor cooling

Can Handle water temperature to an average of 75° C over short periods

Integrated non-return valve

Pump up to 10mm particle size

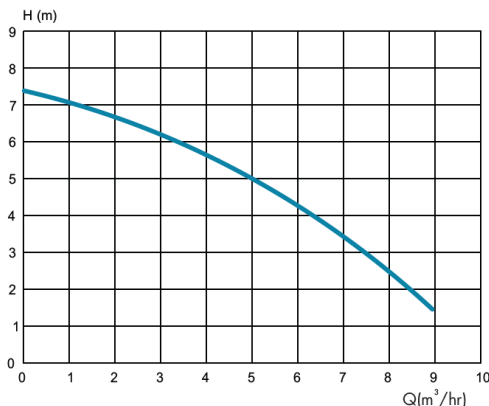

APPLICATION



Portable pump

FOR

Domestic, industrial and agricultural

Sumps

Flood water

Elevator shaft

Rainwater manholes

SANISUB[®] STEEL



Sanisub Steel and Emergency kit

Product Reference: SUBSTEELE

Sanisub Steel

Product Reference: SUBSTEEL

Saniflo

SFA SOUTH AFRICA

Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.