

SANICONDENS® Pro




SANICONDENS® Pro pumps away the condensate from condensing boilers and air conditioners. Small, this powerful pumping unit can be floor or wall mounted.

SANICONDENS® Pro comes with an auxiliary external overflow switch that will shut down the appliance or alert the consumer in the event of pump overflow.



TECHNICAL CHARACTERISTICS

Discharge	8mm
Motor	60 Watts / 0.52 A
Voltage	220-240 V / 50 Hz
Sound level	45 dB (A)
Working Water Temp (max)	80°C (S3 15%)
Product Weight	2 kg's
Overall Measurements	260mm x 170mm 135mm
Inlet Pipe Work	28mm with adaptor
IP Rating	IP20
Maximum flow rate	342 l/h (+-15%)
Max discharge height	4.5 m

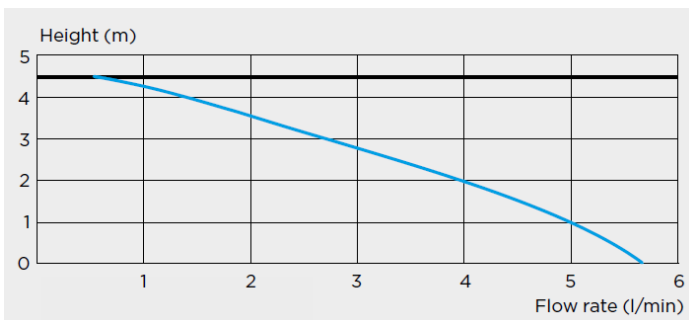

APPLICATION



Air conditioner
Refrigerated display
Ice machine
Boilers

WHY CHOOSE THIS PRODUCT

Quiet design - sound level at 1m = 45 dB

Max flow rate 342 L/h +/- 15%

2 Litre tank with 2 inlets

Product Reference: SK6

Saniflo

 **SFA** SOUTH AFRICA
Shaking up water

Made in France to the highest standards, needs to be installed by a qualified installer.